



**LOW VOLTAGE ENERGY STORAGE SYSTEM  
-FOR RESIDENTIAL AND SME**

# Pylon Technologies Co., Ltd.

As the leading vertically integrated manufacturer of lithium iron phosphate battery systems, Pylontech has provided various battery solutions for nearly all kinds of ESS applications.

Thanks to our self-developed core technology in cells/BMS/system design, Pylontech has delivered more than 2.0GWH batteries serving 120,000+ users.



## Vertical industry integration chain

---



## Advantage

---

- Developed with our own LFP (lithium iron phosphate) cell to ensure the highest safety
- Self-designed BMS protects the cell in all angles such as abnormal temperature, current, voltage, SoC, SoH
- Vertical industry integration ensures more than 6000 cycles with 90% DoD
- Modular design gives the end customers the power of choice of capacity
- Compatible with most of the available Hybrid inverters
- Simple buckle fixing minimize the installation time and cost
- The third generation US2000C and US3000C are compatible with US2000 and US3000
- Provides pre-charge function to protect ESS system from surge current.



# Specification



Basic Parameters	US2000C	Phantom-S	US3000C
Nominal Voltage (V)	48	48	48
Nominal Capacity (Wh)	2400	2400	3552
Usable Capacity (Wh)	2200	2200	3200
Dimension (mm)	442*410*89	440*440*88.5	442*420*132
Weight (Kg)	24	24	32
Discharge Voltage (V)	45 ~ 53.5	45 ~ 53.5	45~53.5
Charge Voltage (V)	52.5 ~ 53.5	52.5~53.5	52.5~53.5
Charge / Discharge Current (A)	25(Recommend)	25(Recommend)	37 (Recommend)
	50 (Max)	50 (Max)	74 (Max)
	90 (Peak@15s)	100 (Peak@15s)	90 (Peak@15s)
Communication Port	RS485, CAN	RS485, CAN	RS485, CAN
Single string quantity(pcs)	16	8	16
Working Temperature/°C	0~50	0~50	0~50
Shelf Temperature/°C	-20~60	-20~60	-20~60
Humidity	5%~85%	5%~85%	5%~85%
Altitude (m)	<2000	<2000	<2000
Design life	15 <sup>+</sup> Years (25°C/77°F)	15 <sup>+</sup> Years (25°C/77°F)	15 <sup>+</sup> Years (25°C/77°F)
Cycle Life	>6000, 25 C	>6000, 25 C	>6000, 25 C
Authentication Level	UL/IEC62619/CE /UN38.3	IEC62619/CE /UN38.3	UL/IEC62619/CE /UN38.3
Feature	Pre-Charge Dual-active protection Flexible current steps Dry contact wake up		Pre-Charge Dual-active protection Flexible current steps Dry contact wake up


## PYLONTECH FORCE SERIES

Pylontech Force L1 is the latest version of HESS (home energy storage system), inherit with our modular design concept, combined with easy installation, simple connectors and outdoor compatibility, the furniture type of equipment is your ideal place to hold your valuable force - the electricity.

### Advantages

1. Modular design gives highest flexibility
2. LFP cell inside enable longest life and highest safety
3. Quick connector to save installation time
4. Furniture like design suits both indoor and outdoor installation
5. Proven BMS with widest compatibilities with inverters

### Solution of ESS

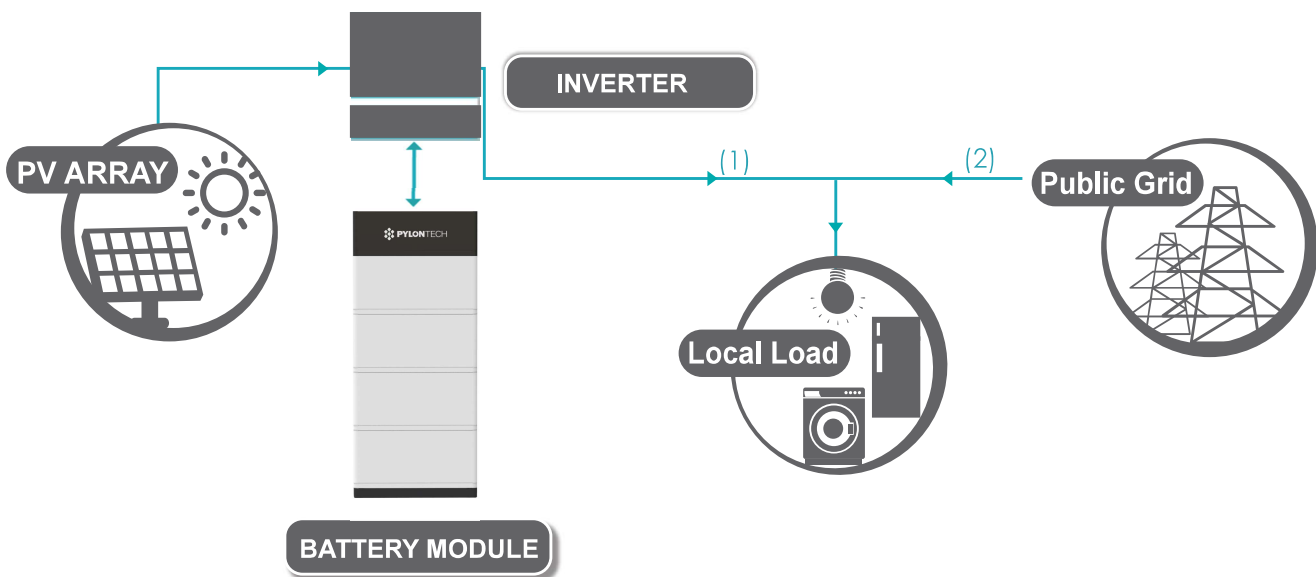

## Technical Specification

### FORCE L1



Battery Module	2	3	4	5	6	7
Battery System Capacity (kWh)	7.10	10.65	14.21	17.76	21.31	24.86
Voltage Range (V)	44.5~54					
Dimension (W*D*H mm)	600*380*530	600*380*700	600*380*870	600*380*1040	600*380*1210	600*380*1380
Weight (kg)	84	119	154	189	224	259
Depth of Discharge	90%					
Charge/Discharge (Recommend)	30	45	60	75	90	100
Current(A) (Continuous)	75	100	100	100	100	100
(Peak@15s)	105	105	105	105	105	105
Communication	CAN,RS485					
Protection Class	IP55					
Working Temperature( °C)	0~50					
Storage Temperature( °C)	-20~60					
Humidity	5%-95%					
Altitude (M)	<2000					
Design Life	15 <sup>+</sup> Years (25 °C /°F)					
Cycle Life	>6000, 25 C					
Authentication Level	VDE/IEC62619/CE/UN38.3					

## Technical Specification

### FORCE L2



Battery Module	2	3	4
Battery System Capacity (kWh)	7.10	10.65	14.21
Voltage Range (V)	44.5~54		
Dimension (W*D*H mm)	450*300*820	450*300*1120	450*300*1410
Weight (kg)	83	119	155
Depth of Discharge	90%		
Charge/Discharge (Recommend)	30	45	60
Current(A) (Continuous)	75	100	100
(Peak@15s)	105	105	105
Communication	CAN,RS485		
Protection Class	IP55		
Working Temperature(℃)	0~50		
Storage Temperature(℃)	-20~60		
Humidity	5%-95%		
Altitude (M)	<2000		
Design Life	15 <sup>+</sup> Years (25℃/°F)		
Cycle Life	>6000, 25℃		
Authentication Level	VDE/IEC62619/CE/UN38.3		



[sales@pylontech.com.cn](mailto:sales@pylontech.com.cn) [www.pylontech.com.cn](http://www.pylontech.com.cn)  
20LV031003